



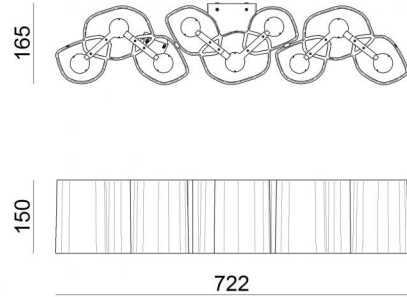

Wall Lights | 220-240 V
72 topLED 19 W DC - 10 W AC | CRI 90
8690



| Technical data | |
|--|---------------------|
| Construction year | 2019 |
| Type | Wall Lights |
| Installation position | Wall lights |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward and upward |
| Power | 19 W |
| Source lumens | 2076 lm |
| Frequency | 60 - 50 Hz |
| CCT / Tone | 2700 K |
| Colour rendering index | 90 Ra |
| C.C. / C.V. | AC |
| Safety class | 1 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Driver included | Driver |
| Dimmable article | Phase cut |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |
| Net weight | 2,195 Kg |
| Electrostatic discharge protection | No |
| Surge protection | No |

Finishing casing

| | |
|------------|----------------|
| Material | Iron |
| Colour | white |
| Processing | Powder coating |

Finishing diffuser

| | |
|----------|-------|
| Material | PC |
| Colour | white |



Wall Lights | 220-240 V | 72 topLED 19 W DC - 10 W AC | CRI 90 | Base
8690

Double emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 72 topped LEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2076 lm, with a 109.3 lm/W nominal luminous efficacy.

The device body is made of iron and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2,195 kg.

The total absorbed power is 19 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| Illuminotechnical Features | |
|---|----------------|
| Light Output Ratio (LOR) | 65 % |
| Source lumens | 2076 lm |
| Delivered lumens | 1355.54 lm |
| Consumption | 10 W |
| Luminaire efficacy | 135 lm/W |
| Colour temperature | 2700 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 90 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25 |
| LED Life / Failure Ratio | |
| L70 B20 C0 72500h (at Tj 115 Ta 25) | |



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080