

# 73

standard

73 results from blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. A flat LED is positioned to fill the resulting volume with diffuse light, accentuating the volumetric perception of the piece.



73  
standard

Lamping

2.3w LED

Material

blown glass, braided metal coaxial cable, electrical components, brushed nickel or white powder coated canopy

Patent

US Patent # D762,323 S  
EU Patent # 002633230-0001 - 0003



LOW VOLTAGE LUMINAIRE  
E476186




standard size pendant  
±260-305 (10.5"-12")

oversized pendant  
±400 (15.75")


# 73

standard

Surface Mount  
Wall/ceiling




Adjustable  
Lengths  
Random canopies.

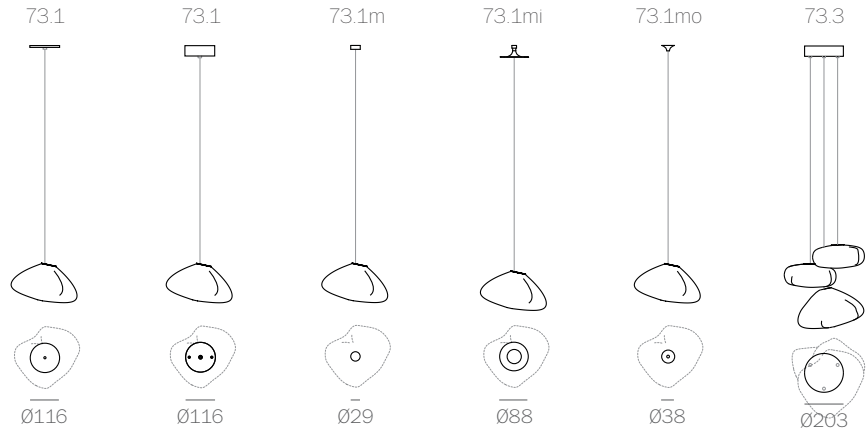

adjustable  
up to  
3000 (10')  
standard

adjustable  
up to  
30500  
(100')  
custom

Fixed Lengths  
Random canopies.

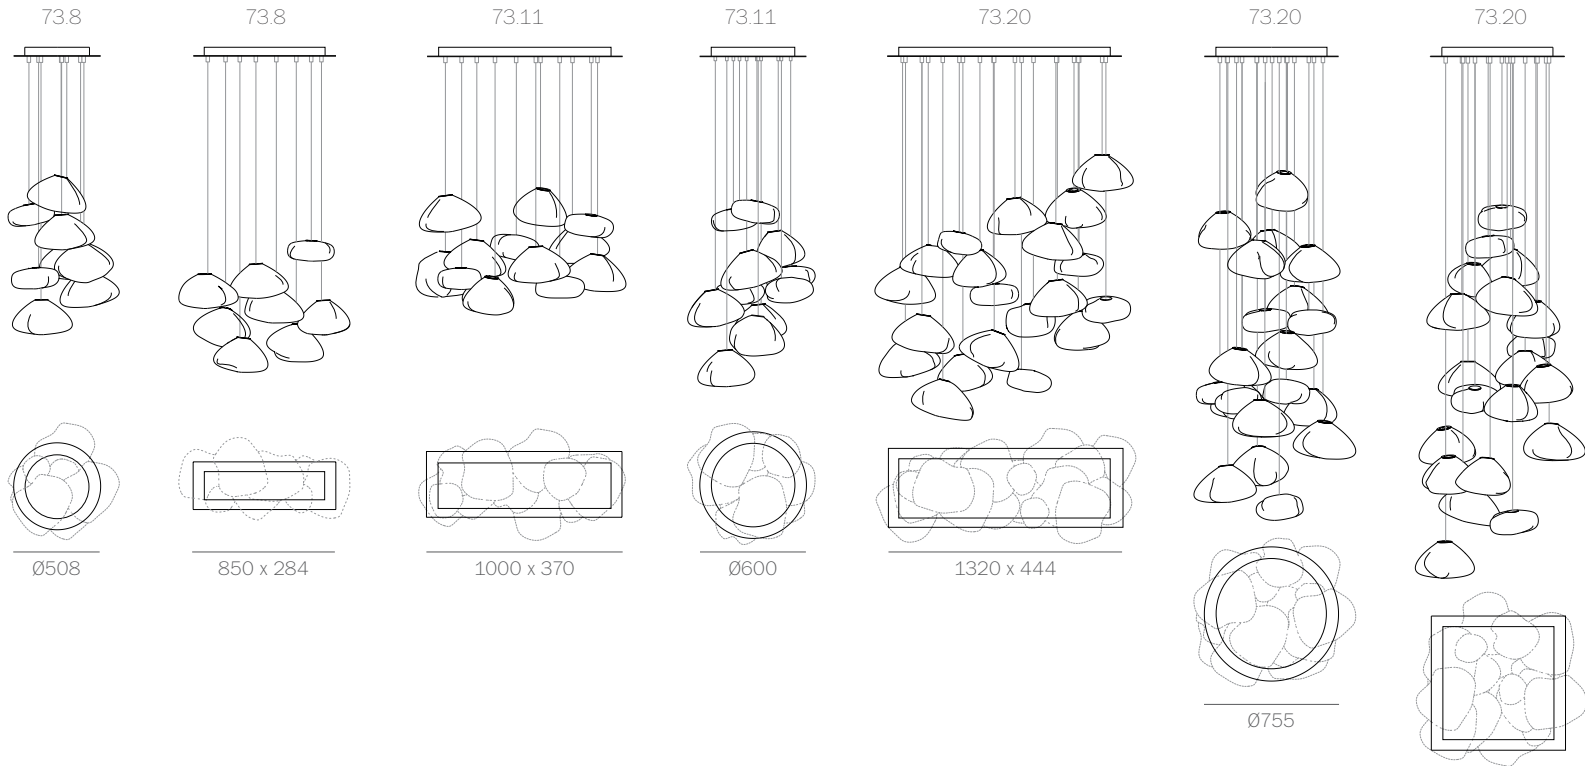

fixed  
length  
up to  
3000 (10')  
standard

fixed  
length  
up to  
30500  
(100')  
custom

755

**BOCCI**

73  
standard





73  
standard



73  
standard



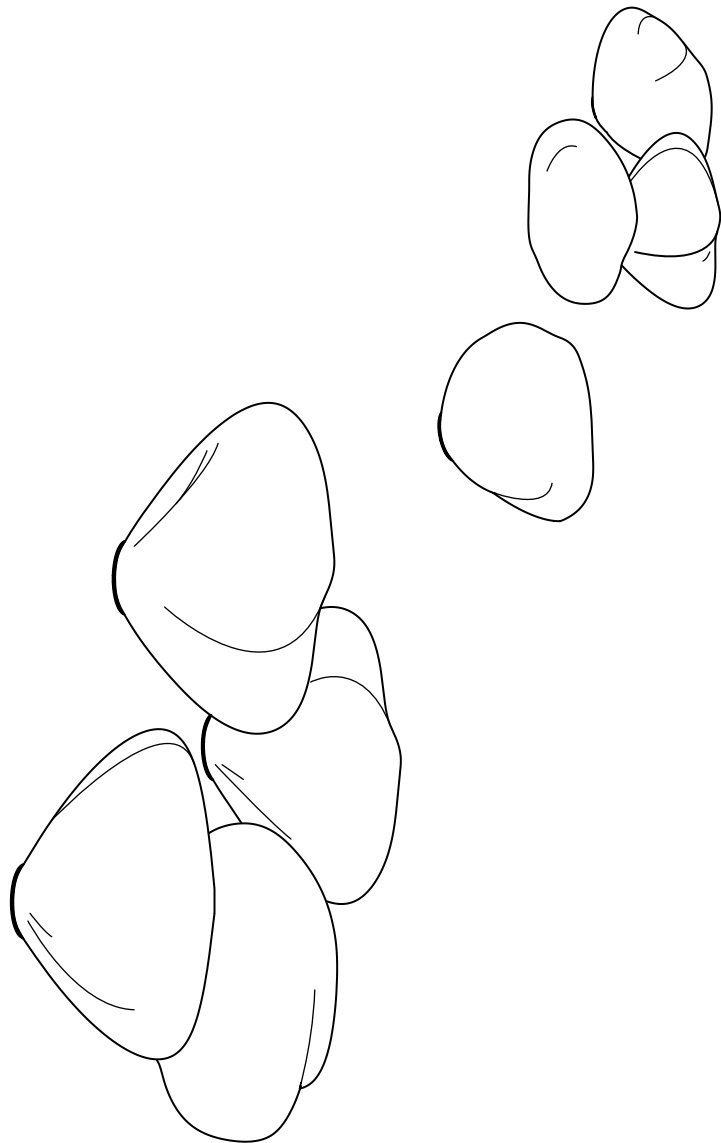

standard size  
pendant  
±260 - 305  
(10.5" - 12")  
oversized  
pendant  
±400  
(15.75")

SURFACE LIGHT (WET LOCATION)

73s

Design by Omer Arbel  
PRODUCT SPECIFICATION

- PENDANTS: one
- MOUNTING: metal mounting plate 79mm (3.1") in diameter
- LAMPING: 2.3w LED
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, stainless steel hardware, electrical components, silicone gasket, metal mounting plate
- WEIGHT: approx. 2.7kg (6lb)
- TRANSFORMERS: remote mounted. Transformers included

#### DESCRIPTION

The 's' designation in this variation on the 73 refers to it being surface-mounted, with transformers mounted remotely. This surface light has a discrete 79mm (3.1") in diameter mounting plate designed for installation on walls as well as ceilings. It is also IP65 designated meaning that the 73s can be used outdoors and in other wet environments.

The 73 is formed by blowing liquid glass into a folded and highly heat-resistant ceramic fabric vessel. The resulting shape has a formal and textural expression intuitively associated with fabric, which becomes permanent and rigid as it cools. Each 73 is completely unique in proportion, size and shape.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)
- + Requires transformers to be remote mounted.

US Patent # D762,323 S  
EU Patent # 002633230-0001 - 0003


Made in Vancouver, Canada

Vancouver  
[sales@bocci.ca](mailto:sales@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

Berlin  
[europe@bocci.ca](mailto:europe@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

approx. 2.7kg (6lb)






1

Mount transformer remotely and route output wiring from transformer to surface mounted light location.

Connect the black wire to black and white wire to white wire.

For multiple sconce installations, ensure that the braided outer wires are all connected to one 12V output wire and all inner insulated wires are connected to the other or a short will occur.


Note: Standard junction boxes are not compatible with the 73s. The surface mounted light cover plate mounts directly to the wall. Transformers must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.



2

Drill a maximum 13mm (0.75") diameter hole.


Join transformer wiring to back plate wiring using connectors provided.



3

Slightly stretch the silicone ring to fit around the cover plate.

Tuck wiring into wall opening and affix the cover plate with fasteners provided.

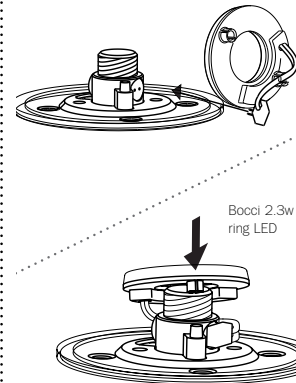

4

Bocci 2.3w LED lamps included.


Plus the LED into the lamp socket and make sure the lampholder is received fully by the cap before fitting the LED onto the two posts.

Push the lamp holder onto the two posts located on the plate. Make sure the short step on the lamp holder matches with the pin on the high step of the cap.

Do not touch the lamp with your bare hands.


Note: when using a dimmer use only low voltage electronic dimmer.

Put the silicone gasket onto the nut with the indented side facing toward the cast glass hemisphere.



5

Gently thread glass pendant onto back plate. Do not tighten past the point of contact.



6

Clean fingerprints from glass surfaces.

Turn fixture on.

For additional assistance, please contact Bocci:

Vancouver  
sales@bocci.ca  
www.bocci.ca

Berlin  
europe@bocci.ca  
www.bocci.ca

US Patent # D762,323 S  
EU Patent # 002633230-0001  
- 0003

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE  
E476186

SURFACE LIGHT

73s


Design by Omer Arbel  
PRODUCT INSTALLATION INSTRUCTIONS

© 2018, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.ca

**BOCCI**



## 120/240V LED Driver - 4W

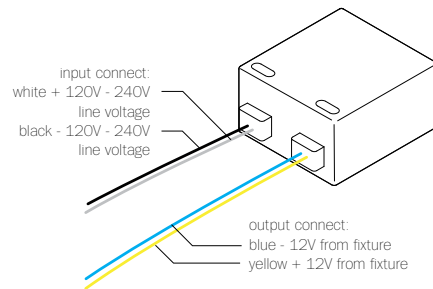

### B-L03U-12V

PRIMARY: AC 100 - 240V, 120mA, 50/60Hz

SECONDARY: Max. 12V DC (4.2w max.)


LAMPING: 1w LED lamps: 1-3  
1.5w LED lamps: 1-2  
1.8w LED lamps: 1-2  
2.3w ring LED lamps: 1

DIMMING: Non-dimmable


NOTES: Constant voltage  
Class 2 power unit  
For LED lamps only

DIMENSION: 43mm (1.7") x 41mm (1.6") x 22mm (0.8")

DESIGNATION:



## 120/240V LED Driver - 8W

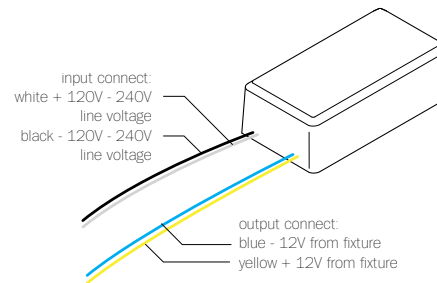

### B-L07U-12V

PRIMARY: AC 100 - 240V, 170mA, 50/60Hz

SECONDARY: Max. 12V DC (8.4w max.)


LAMPING: 1w LED lamps: 1-7  
1.5w LED lamps: 1-5  
1.8w LED lamps: 1-4  
2.3w ring LED lamps: 1-3

DIMMING: Non-dimmable


NOTES: Constant voltage  
Class 2 power unit  
For LED lamps only

DIMENSION: 65mm (2.5") x 35mm (1.3") x 28mm (1.1")

DESIGNATION:



## 120/240V LED Driver - 24W

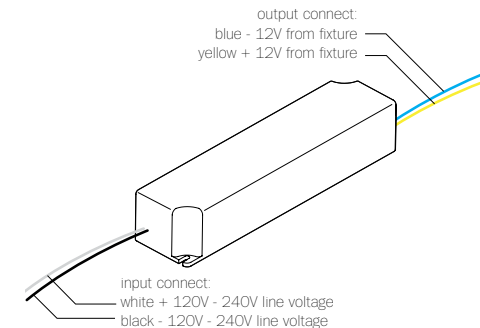

### B-L24U-12V

PRIMARY: AC 100 - 240V, 300mA, 60Hz

SECONDARY: Max. 12V DC (24w max.)

LAMPING: 1w LED lamps: 1-24  
1.5w LED lamps: 1-16  
1.8w LED lamps: 1-13  
2.3w ring LED lamps: 1-10




DIMMING: Dimmable using minimum 8 lamps and improves with larger load. Use low voltage electronic dimmers only

NOTES: Short Circuit Protection  
Constant voltage  
Class 2 power unit  
For LED lamps only

DIMENSION: 42mm (1.7") x 170mm (6.7") x 33mm (1.3")

DESIGNATION:



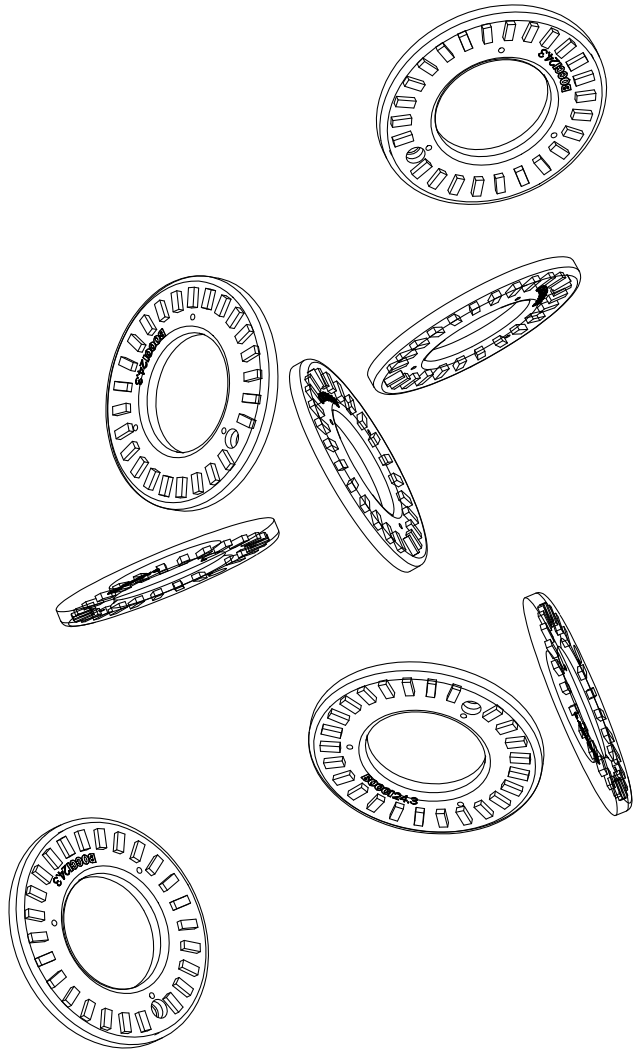

WATTAGE: 2.3w  
 COLOUR TEMPERATURE: 2400k  
 CRI: 75 (100 is daylight)  
 LIGHT OUTPUT: 190 lumens  
 EFFICIENCY: 83 lm/w  
 LAMP LIFE: 25,000 hours

**DESCRIPTION**

The 24.3 LED lamping option offers a longer-life, energy efficient alternative to typical halogen or xenon lamps. This proprietary and worldwide patent pending design utilizes a bipin snap connector that allows the lamp to be easily replaced.

This unique replacement design eliminates the waste associated with catastrophic failures that leave no choice but to replace the entire fixture. When it comes time to relamp with the Bocci lamp, the LED may simply be replaced. The Bocci LED lamp keeps the fixture out of landfills in the future, protects your investment and introduces a significant saving of energy.

**NOTES**

- + Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)
- + Compatible with 73 pendants only.

RoHS 

Vancouver  
[sales@bocci.ca](mailto:sales@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

Berlin  
[europe@bocci.ca](mailto:europe@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

LED

**2.3W**

Design by Omer Arbel  
 PRODUCT SPECIFICATION